

Maxstar® 150 STL

Issued January 2007 • Index No. DC/27.1

TIG/Stick Welding
Power Source



Quick Specs

Light Industrial Applications

Process Piping
Dairy Industry
Food/Beverage Industry
Restaurant/Kitchen Repair
Experimental Aircraft
Shipboard Installation/Repair
Maintenance Repair

Processes

Lift-Arc™ TIG (GTAW)
Stick (SMAW)

Input Power

1-Phase Power

Amperage Range 115 VAC: 5–150 A (DC TIG)
20–100 A (DC Stick)
230 VAC: 5–150 A (DC TIG)
20–150 A (DC Stick)

Max. Open-Circuit Voltage 90

Weight 13.7 lb (6.2 kg)

The Power of Blue.®

Low OCV Stick is a simple design that reduces the open-circuit voltage to 12–16 V when the welding power source is not in use. This circuit design is now built into the Maxstar 150 STL eliminating the need for add-on voltage reducers.

Portable in the shop or at the job site — at 13.7 lb the shoulder strap allows the end user to easily move from location to location.

Best in class TIG and Stick arc characteristics for those demanding jobs.

Single amperage range allows operator to accurately set amperage on both 115 or 230 V primary power.

Built-in gas solenoid eliminates the need for bulky torch with a gas valve.



Maxstar® 150 STL Stick/TIG package with protective carrying case and remote (#907 135-01-2) shown.

Easy installation — Auto-Line™ provides state-of-the-art flexibility to the end user. The Auto-Line circuitry automatically connects to 115–230 VAC, single-phase power without removing the covers to relink the power source. No longer is there a concern if you have the correct machine for the shop or job site.

Base Unit (#907 135)

Comes Complete With:

Power source with cord, 13 ft (4 m) stick electrode holder, 10 ft (3 m) work clamp, international flow-thru adapter, and shoulder strap.

Inverter-based, DC power source has a **simple-to-use operator interface** providing only the necessary controls in a compact machine.

Thermal overload protection with indicator light helps prevent machine damage if the duty cycle is exceeded or airflow is blocked.

Lift-Arc™ start provides TIG arc starting without the use of high frequency.

Adaptive Hot Start™ for Stick arc starts automatically increases the output amperage at the start of a weld should the start require it. Prevents the electrode from sticking and creating an inclusion.

Full function remote control allows operator to crater out when doing critical work. (6-pin finger tip or foot control available.)



Power source is warranted for 3 years, parts and labor.
Original main power rectifiers are warranted for 5 years.

MADE IN USA
APPLETON, WI



Miller Electric Mfg. Co.
An Illinois Tool Works Company
1635 West Spencer Street
Appleton, WI 54914 USA

International Headquarters
Phone: 920-735-4505
USA FAX: 920-735-4134
Canadian FAX: 920-735-4169
International FAX: 920-735-4125

Web Site
www.MillerWelds.com



Specifications (Subject to change without notice.)




Input Power	Rated Output	Welding Amperage Range	Max. Open-Circuit Voltage	Amps Input at Rated Output, 50/60 Hz	KVA at Duty Cycle	KW	Dimensions	Weight
115 VAC Stick	70 A at 22.8 VDC, 100% Duty Cycle	20–100 A	90, 12–16 V*	17.4	2.0	1.9	H: 9 in (229 mm) W: 5-1/2 in (140 mm) D: 13-1/4 in (337 mm)	13.7 lb (6.2 kg)
	100 A at 24.0 VDC, 35% Duty Cycle			26.4	3.0	3.0		
115 VAC TIG	100 A at 14.0 VDC, 100% Duty Cycle	5–150 A	90, 12–16 V*	18.4	2.1	2.1		
	150 A at 16.0 VDC, 30% Duty Cycle			28.0	3.4	3.1		
230 VAC Stick	100 A at 24.0 VDC, 100% Duty Cycle	20–150 A	90, 12–16 V*	13.1	3.0	2.8		
	150 A at 26.0 VDC, 30% Duty Cycle			21.6	4.9	4.7		
230 VAC TIG	100 A at 14.0 VDC, 100% Duty Cycle	5–150 A	90, 12–16 V*	8.3	2.0	1.9		
	150 A at 16.0 VDC, 30% Duty Cycle			14.2	3.2	3.1		

Certified by Canadian Standards Association to both Canadian and U.S. Standards.



*Sense voltage for Stick and Lift-Arc TIG.

Control Panel

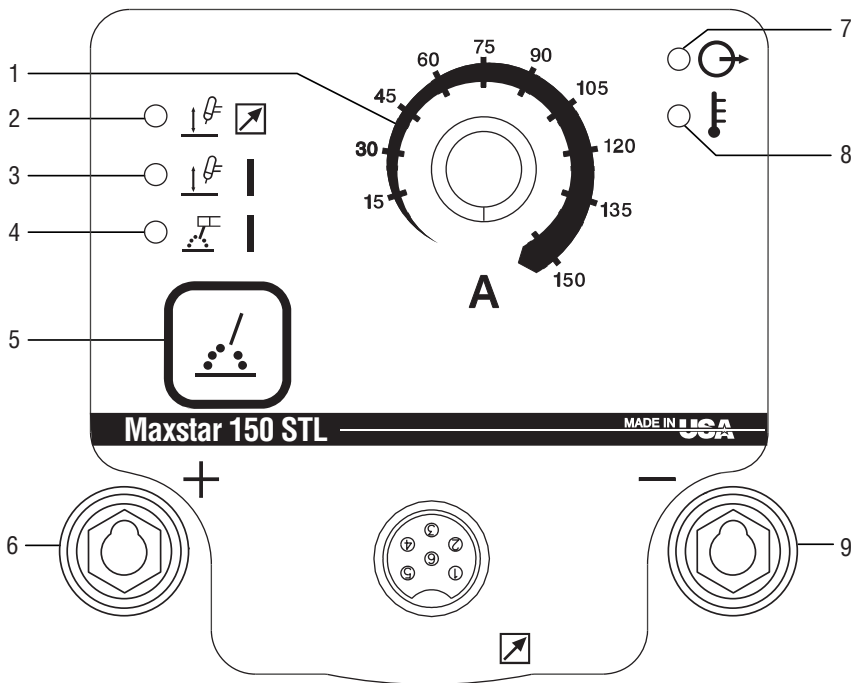

1. Amperage Adjustment Control
2. Remote TIG Selector Light
3. TIG Selector Light
4. Stick Selector Light
5. Process Selector Touch Pad
6. Positive Weld Output Receptacle
7. Ready Light
8. Overtemperature Light
9. Negative Weld Output Receptacle with Flow Thru


Performance Data

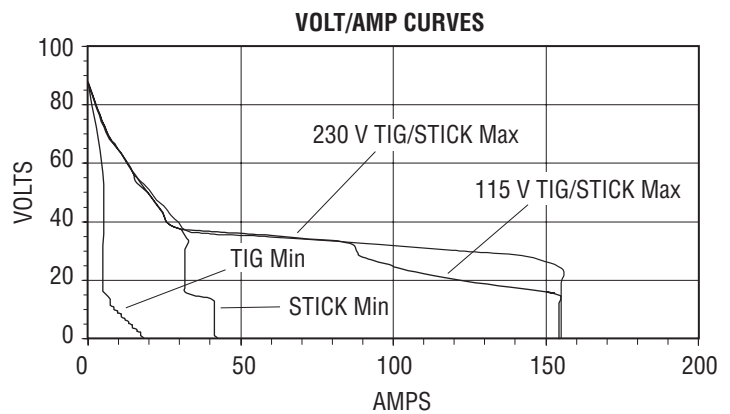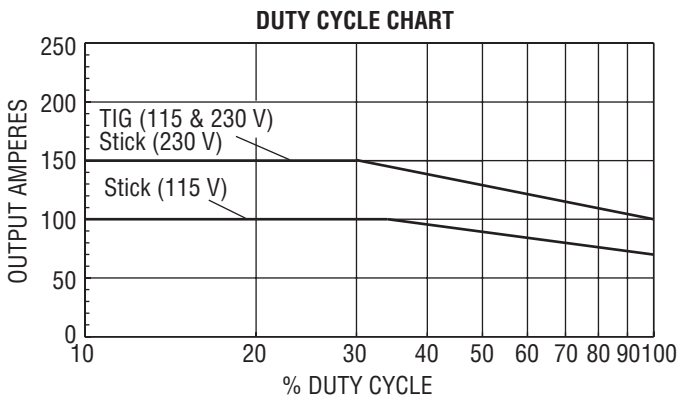

Maxstar® 150 STL Travel Pak

Maxstar 150 STL Travel Pak
#907 135-01-3
 with soft case and tools typical
 for process pipe applications.

**Soft Carrying Case with
 Wheels empty #300 249**

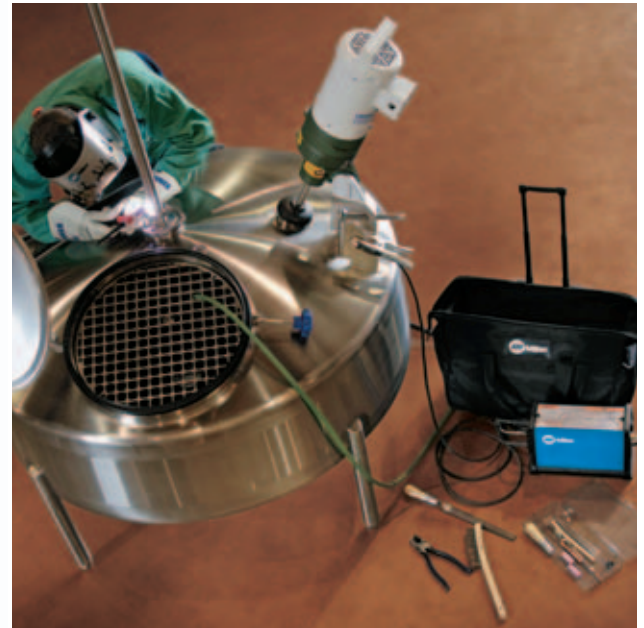

Comes Complete With:

- Power source **#907 135**
- Soft carrying case with wheels **#300 249**
- Smith® Flowmeter gas hose
- Remote finger tip control
- Electrode holder/work clamp
- Flashlight
- Inspection mirror
- Kline 9 in side cutter
- Nicholson half-round bastard file
- Weiler stainless steel brushes and more

Genuine Miller Accessories

Remote Controls



RCCS-6M (6-pin plug)
#195 184 13.25 ft (4 m) cord
#195 503 26.5 ft (8 m) cord

North/south rotary-motion fingertip current/contactor control fastens to TIG torch using two Velcro® straps. Great for applications that require a finer amperage control. Includes cord and plug.



RFCS-6M (6-pin plug)
#195 183 13.25 ft (4 m) cord
#195 504 20 ft (6 m) cord
 Foot pedal current/contactor control. Includes cord and plug.



RMS-6M (6-pin plug) **#195 269**
 Momentary-contact switch for contactor control. Rubber-covered pushbutton dome switch ideal for repetitive on-off applications. Includes 26.5 ft (8 m) cord and plug.

TIG (GTAW) Torch Packages



Weldcraft® TIG Torches

The Weldcraft line of TIG torches complements the most popular TIG power source line available today. The Weldcraft torch line includes both air-cooled and water-cooled models. Available with genuine Weldcraft parts.

Air-Cooled Torches

#WP1712RDI25 150 A, 12 ft (3.7 m)
 air-cooled torch with flow thru adapter
#WP1725RDI25 150 A, 25 ft (7.6 m)
 air-cooled torch with flow thru adapter

Ordering Information

Power Source and Options	Stock No.	Description	Qty.	Price
Maxstar® 150 STL Stick Package	#907 135	Single-phase, 115–230 VAC, 50/60 Hz, includes 13 ft (4 m) electrode holder, 10 ft (3 m) work clamp, shoulder strap and primary cord		
Maxstar® 150 STL Stick/TIG Package with Carrying Case	#907 135-01-1	Includes #907 135 above plus Accessory Pack 1 (protective carrying case, WP1712RDI25 Torch with adapter, gas hose and regulator)		
Maxstar® 150 STL Stick/TIG Package with Case and Remote Fingertip Control	#907 135-01-2	Includes #907 135-01-1 above plus Accessory Pack 2 (#195 184 remote fingertip control for Maxstar 150 STL and STH models)		
Maxstar 150 STL Travel Pak	#907 135-01-3	Includes: #907 135 plus soft carrying case with wheels (#300 249), plus Smith Flowmeter, gas hose, remote finger tip control, electrode holder/work clamp, flashlight, inspection mirror, side cutter, file, brushes, and more		
Maxstar® 150 STL CE	#907 138	CE model, single-phase, 115–230 VAC, 50/60 Hz, includes 13 ft (4 m) electrode holder, 10 ft (3 m) work clamp, shoulder strap, primary cord, international flow thru connector and 6-pin plug		
Accessories				
Protective Carrying Case	#195 180	Empty		
Soft Carrying Case with Wheels	#300 249	Empty		
RCCS-6M	#195 184 #195 503	13.25 ft, Remote Fingertip Control for Maxstar 150 STL and STH only 26.5 ft, Remote Fingertip Control for Maxstar 150 STL and STH only		
RMS-6M	#195 269	26.5 ft, Remote On/Off Control for Maxstar 150 STL and STH only		
RFCS-6M	#195 183 #195 504	13.25 ft, Remote Foot Control for Maxstar 150 STL and STH only 20 ft, Remote Foot Control for Maxstar 150 STL and STH only		
TIG Torch/Regulator Kit	#195 226			
Weldcraft® TIG Torch	WP1712RDI25 WP1725RDI25	150 A, 12 ft (3.7 m) air-cooled torch with flow thru adapter 150 A, 25 ft (7.6 m) air-cooled torch with flow thru adapter		
International-Style Flow Thru Adapter	#195 234	25 mm		

Date:

Total Quoted Price:



Distributed by: